
# Amyl Acetate CH3CO2 (CH2) 4CH3 or CH3CO2C5H11

No.147

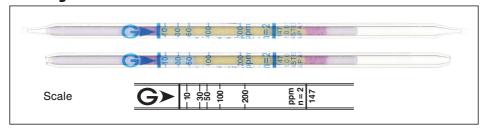

#### Performance

Measuring range	10 to 200 ppm		
Number of pump strokes	2(200 mL)		
Correction factor	1		
Sampling time	3 min		

Detecting limit : 4 ppm (2 pump strokes)
Colour change : Yellow → Pale blue

Operating conditions : Temperature 5 to 40  $^{\circ}$ C (41 to 104  $^{\circ}$ F) correction used

Relative humidity 0 to 90 % correction not used

Relative standard deviation : 10 % (for 10 to 200 ppm) Tube quantity and number of tests per box : 10 tubes for 10 tests

Shelf life: 24 months

### Reaction principle

CH<sub>3</sub>CO<sub>2</sub> (CH<sub>2</sub>)<sub>4</sub>CH<sub>3</sub> + Cr<sup>6</sup> + H<sub>2</sub>SO<sub>4</sub> → Cr<sup>3</sup> +

## Possible coexisting substances and their interferences

Substance	Concentration	Interference	Changes colour by itself to
Alcohols (methanol)		+	Pale blue (≥ 5ppm)
Ketones (acetone)		+	Blackish brown (≥ 10ppm)
Esters (methyl acetate)		+	No stain observed immediately.
			A blackish brown colour
		! !	observed later (≥ 30 ppm)

#### Calibration gas generation

Diffusion tube method