
1,3-Butadiene CH2:CHCH:CH2

No.174LL

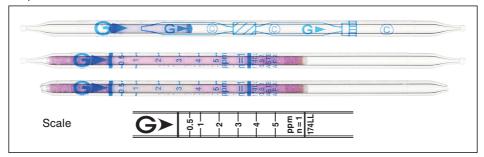

Performance

When used, these tubes are to be connected.

Measuring range	0.5 to 5 ppm		
Number of pump strokes	1 (100 mL)		
Correction factor	1		
Sampling time	3 min		

Detecting limit : 0.1 ppm (1 pump stroke)

Colour change : Pink → Pale yellow

Operating conditions : Temperature 0 to 40 $^{\circ}$ C (32 to 104 $^{\circ}$ F) correction not used

Relative humidity 0 to 90 % correction not used

Relative standard deviation : 10 % (for 0.5 to 1 ppm), 5 % (for 1 to 5 ppm)

Tube quantity and number of tests per box: 10 tubes for 5 tests

Shelf life: 36 months (in the refrigerator)

Reaction principle

CH₂:CHCH:CH₂ + KMnO₄ → Reaction product

Possible coexisting substances and their interferences

Substance	Concentration	Interference	Changes colour by itself to
Ammonia		No	
Carbon monoxide		No	
Carbon dioxide		No	
Hydrogen sulphide		No	
Hydrogen cyanide		No	J
Acetylene	≥ 50 ppm	+	White
Olefins		+	Pale yellow

Calibration gas generation

Permeation tube method