


1,3-Butadiene $\text{CH}_2:\text{CHCH}:\text{CH}_2$

No.174LL

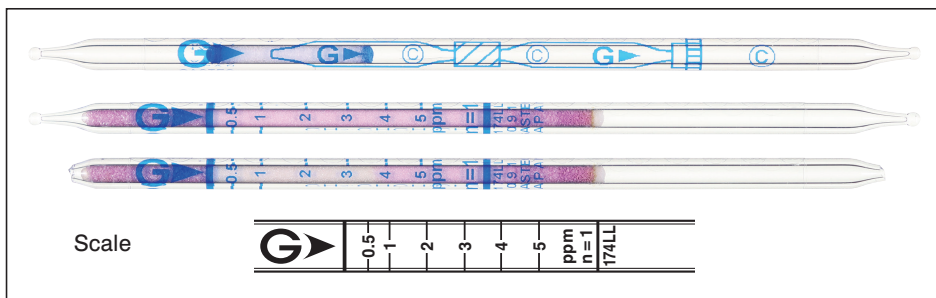

Performance

When used, these tubes are to be connected. See page 2-3.

Measuring range	0.5 to 5 ppm
Number of pump strokes	1 (100 mL)
Correction factor	1
Sampling time	3 min
Detecting limit :	0.1 ppm (1 pump stroke)
Colour change :	Pink → Pale yellow
Operating conditions :	Temperature 0 to 40 °C (32 to 104 °F) correction not used Relative humidity 0 to 90 % correction not used
Relative standard deviation :	10 % (for 0.5 to 1 ppm) , 5 % (for 1 to 5 ppm)
Tube quantity and number of tests per box :	10 tubes for 5 tests
Shelf life :	36 months (in the refrigerator)

Reaction principle



Possible coexisting substances and their interferences

Substance	Concentration:	Interference	Changes colour by itself to
Ammonia		No	No
Carbon monoxide		No	
Carbon dioxide		No	
Hydrogen sulphide		No	
Hydrogen cyanide		No	
Acetylene	≧ 50 ppm	+	White
Olefins		+	Pale yellow

Calibration gas generation

Permeation tube method